

PEPPY TAPS

PRODUCT SPECIFICATION DOCUMENT

FILTERED WATER: Boiling, Ambient, Chilled, Chilled Soda
UNFILTERED WATER: Hot and Cold mains

FINISHING COLOURS

CHROME	Electroplated
MATTE BLACK	Electroplated
BRUSHED NICKEL	PVD (physical vapor deposition)
GUN METAL GREY	PVD
BRUSHED BRASS GOLD	PVD

The entire Peppy Tap range features

- Filtered Boiling,
- Hot and Cold Mains, and
- either Filtered Ambient, Filtered Chilled or Filtered Chilled Soda,

all in the convenience of one tap.

Peppy Taps Pty Ltd

Watermark License : WMKA26680

WELS Licencse: 1998

Flagship series 4IN1 taps

WELS Rating 5 stars - 6L per minute

Signature series 4IN1 tap

WELS Rating 4 stars - 7L per minute

Signature series 4IN1 Pullout tap

WELS Rating 5 stars - 6L per minute

Signature series 5IN1 tap

WELS Rating 4 stars – 6.5L per minute

For the entire range:

- Recommended minimum water pressure: 150 Kpa
- Recommended maximum water pressure: 500 Kpa
- Temperature rating : 1-98 Degrees Celcius
- Construction: Brass (and some stainless steel)
- Hole Size in bench for tap: 35mm
- Warranty: 2 Years (parts and labour)
- Commercial warranty: 12 months (parts and labour)
- **Tank water use voids all warranties**
- The entire Peppy Taps range is certified lead-free.

Installation Requirements.

Installation of your Peppy Tap 4IN1 or 5IN1 system must be carried out by a registered plumber, observing all national and local regulations. No special tools are required.

Mains electrical: a dedicated standard 220/240v grounded 10AMP GPO is required

Mains water: Drinking water connections and wastewater drainage are both required. The Peppy Taps units are all fed by the Cold Mains. Use Mains water only.

February 2026



PEPPY TAPS

Every system has a Filter and a Boiler unit and then may have either a Chiller unit or Soda machine depending on the system purchased.

Purchase Order options		Filter	Boiler	Chiller	Soda
1	4IN1 FLAGSHIP Boiling / Ambient	✓	✓		
2	4IN1 FLAGSHIP Boiling / Chilled	✓	✓	✓	
3	4IN1 FLAGSHIP PULLOUT Boiling / Ambient	✓	✓		
4	4IN1 SIGNATURE Boiling / Ambient	✓	✓		
5	4IN1 SIGNATURE Boiling / Chilled	✓	✓	✓	
6	4IN1 SIGNATURE PULLOUT Boiling / Ambient	✓	✓		
7	4IN1 SIGNATURE PULLOUT Boiling / Chilled	✓	✓	✓	
8	5IN1 SIGNATURE Boiling / Chilled / Soda	✓	✓		✓

The Boiler unit has 7 preset temperatures: 75, 80, 85, 90, 95, 96, 97 and 98 degrees Celsius with a 2.4L tank. The Boiler is an open vent design which means no grates are needed on the cabinetry. The Boiler is certified to RCM standards and has passed all Watermark testing (refer next page).

The Chiller unit temperature can be set from 4 to 14 degrees in single degree Celsius increments with a 2.0L tank. The Chiller utilises R600A refrigerant which is non-ozone depleting.

The Soda machine dispenses both chilled water and chilled soda water. The temperature can be set from 4 to 14 degrees in single degree Celsius increments and has a 4.0L water tank. The Soda machine utilises R600A refrigerant which is non-ozone depleting. The Soda machine regulator is used to set the desired pressure (typically 40 PSI). Bubbles are best at the lowest temperature (4C).

Important: The Soda machine requires adequate ventilation. If necessary, provide a ventilation grille in the cabinetry, but at least ensure proper space around the machine as per pg5 "Soda Machine Weight and Dimensions."

The CO₂ canister is pressurized. It must be operated in a vertical position and prevented from falling over. Only CO₂ canisters up to max. 2kg with a 1/2" thread may be used.

BOILER / CHILLER / SODA CAPACITY: Residential and Small Offices (up to 12 people)

The Pentair Everpure 2CB5-S filter has been certified under NSF/ANSI Standard 42 and Watermark. Filtration level is to 5 microns.

Capacity: 11,355L (30,000 gallons)

Maintaining a valid warranty for the Boiler, Chiller, and Soda units is dependent upon ensuring the Pentair filter is replaced every 12 months. (proof of purchase required)

ORDER CODES

FILTER CARTRIDGE	EV9617-22
FILTER HEAD	EV9256-20

February 2026

PEPPY TAPS


BOILER UNIT WEIGHT AND DIMENSIONS

Every Peppy Taps system will include a Boiler unit with a 2.4L water capacity.

Consider the positioning of the Boiler unit when installing:

- Minimum airspace of 50mm to each side of the unit
- Minimum airspace of 25mm to the rear of the unit

Weight: 3.95 kg (empty)

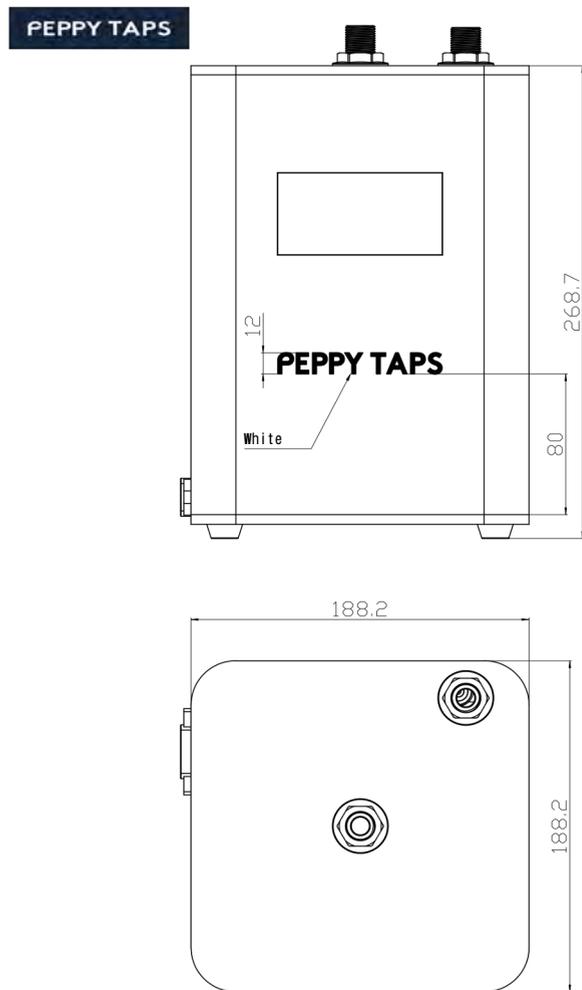

PEPPY TAPS

CHILLER UNIT WEIGHT AND DIMENSIONS





The Chiller unit is used with the Flagship 4IN1, the Signature 4IN1, and Signature 4IN1 Pullout, and has a 2.0L water capacity.

Consider the positioning of the Chiller unit when installing:

- Minimum airspace of 100mm to each side and rear of the unit

Weight: 11.7 kg (empty)

PEPPY TAPS

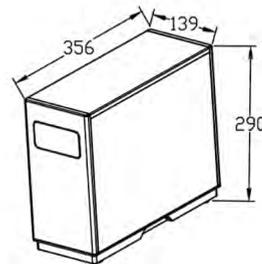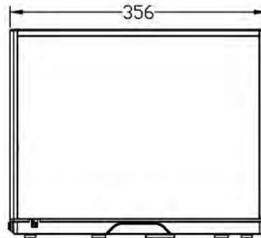

PEPPY TAPS


SODA MACHINE WEIGHT AND DIMENSIONS

The Soda machine is for use only with the Signature series 5IN1 tap and has a 4.0L water capacity.

Consider the positioning of the Soda machine when installing:

- Minimum airspace of 100mm to each side and rear of the unit

Weight: 15 kg (empty)

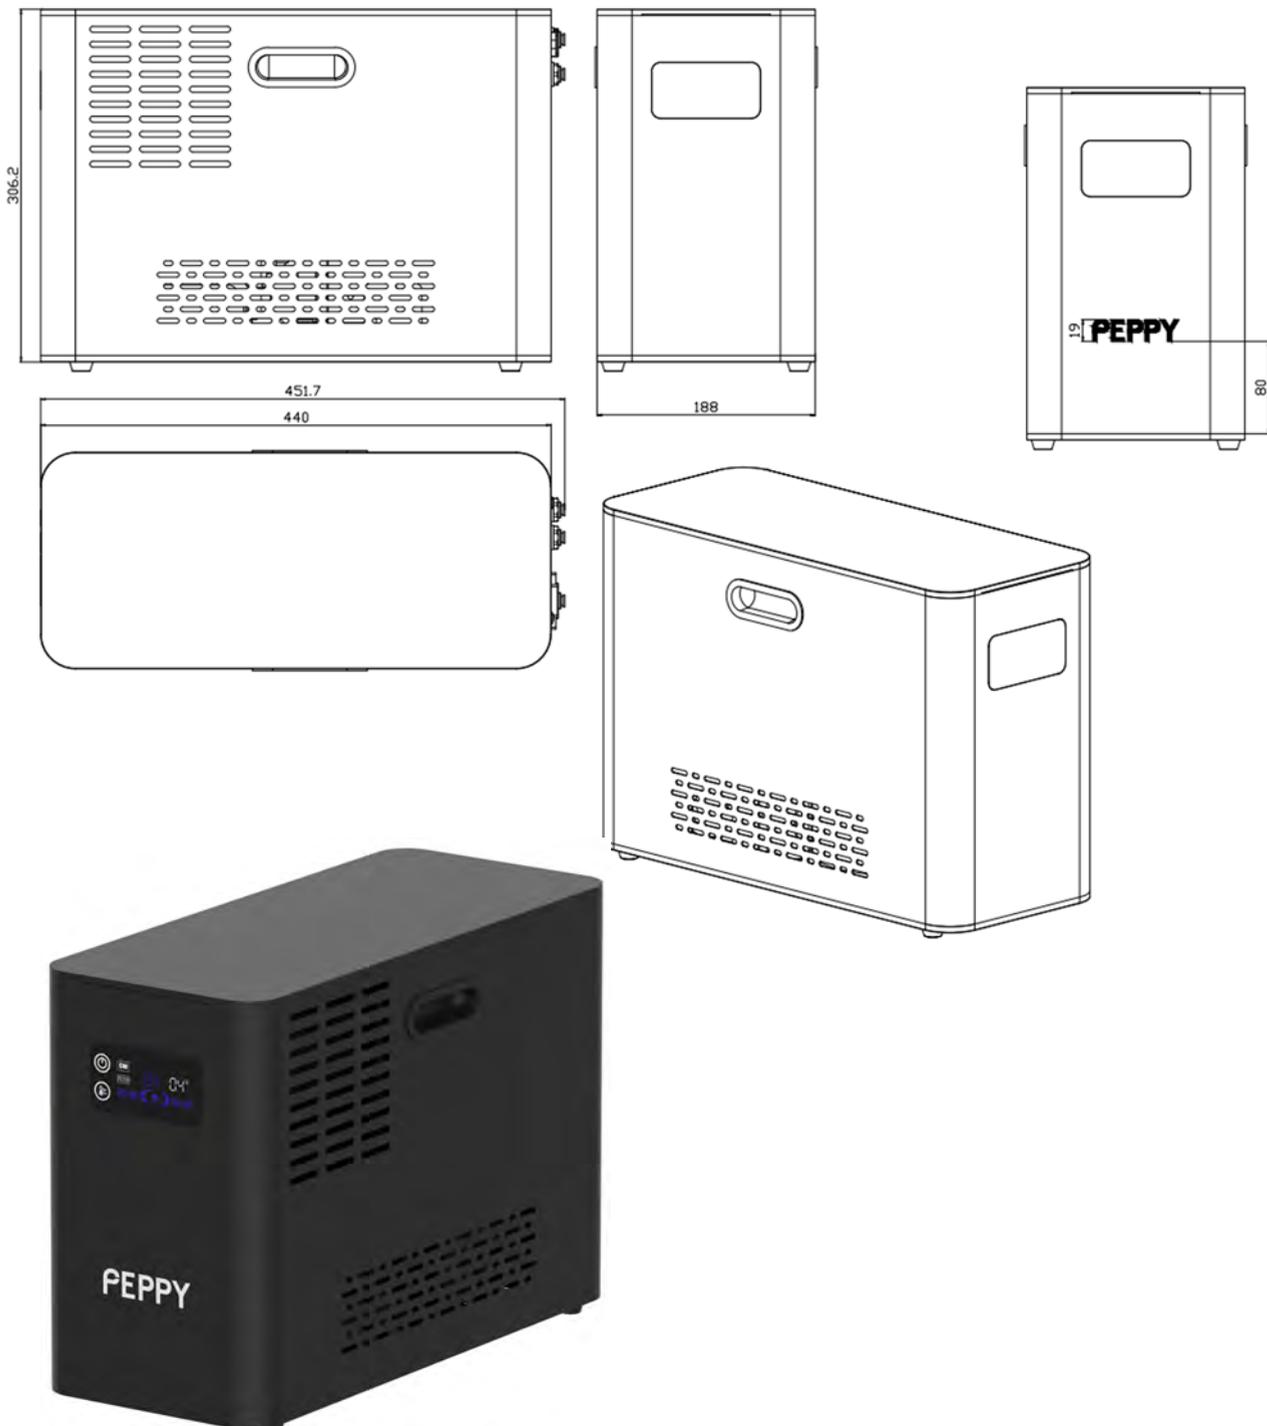


PEPPY TAPS

FILTER SIZE WEIGHT AND SIZE DIMENSIONS

Only this filter may be used for warranty to be valid and must be used with every system. Ensure filter is changed every 12 months with proof of purchase to ensure warranty remains valid.

Capacity: 11,335L
Weight: 0.95 kg

10.25in = 26.04cm (total height)
8.25in = 20.96cm

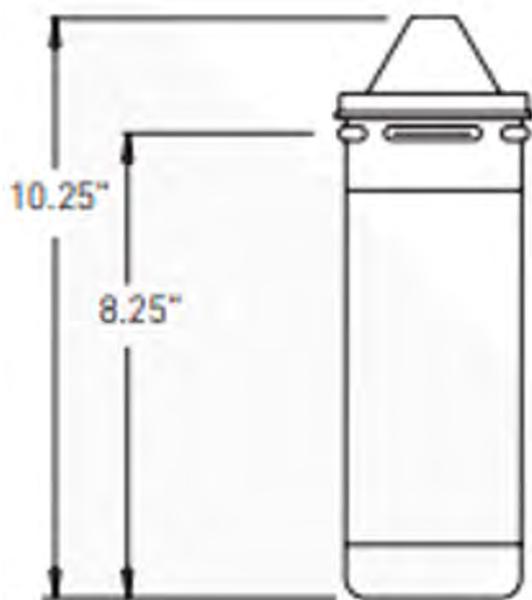

PEPPY TAPS


FLAGSHIP SERIES 4IN1

FILTERED BOILING, FILTERED AMBIENT, HOT & COLD MAINS

FILTERED BOILING, FILTERED CHILLED, HOT & COLD MAINS

ORDER CODES


CHROME	4IN1BACH	4IN1BCCH
MATTE BLACK	4IN1BAMB	4IN1BCMB
BRUSHED NICKEL	4IN1BABN	4IN1BCBN
GUN METAL GREY	4IN1BAGMG	4IN1BCGMG
BRUSHED BRASS GOLD	4IN1BABBG	4IN1BCBBG

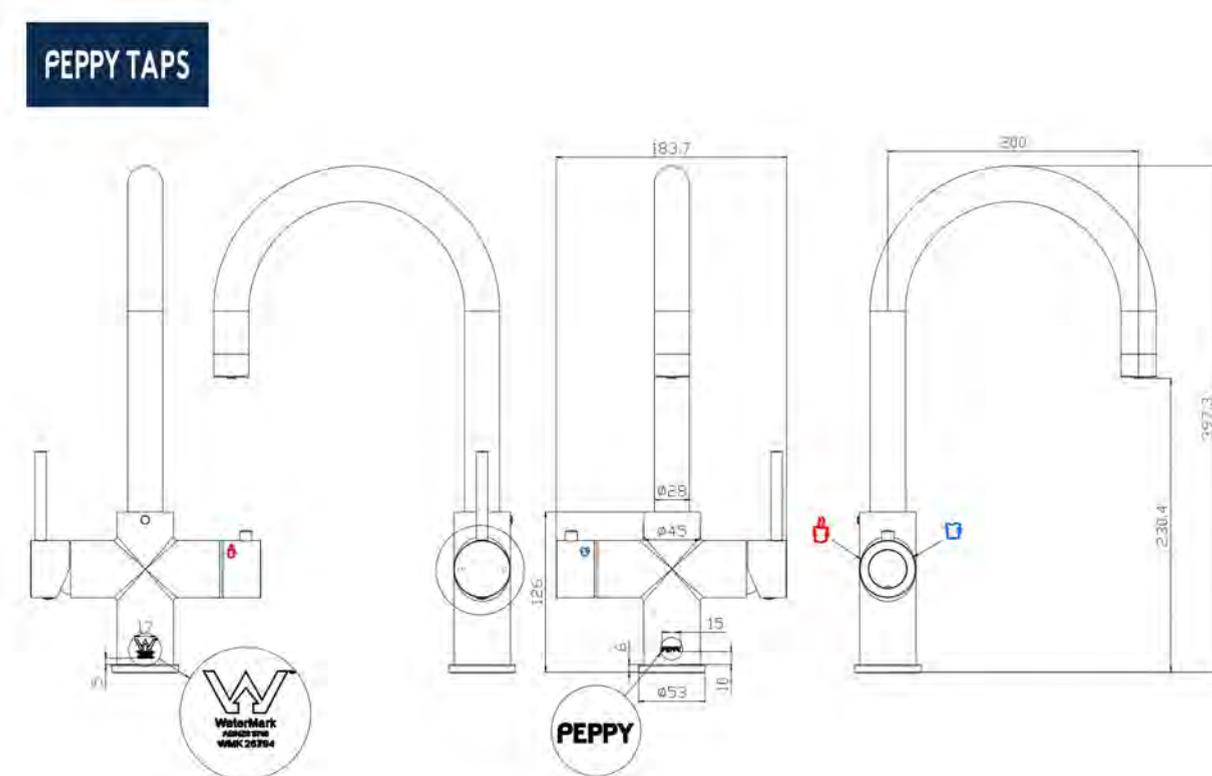

PEPPY TAPS

FLAGSHIP SERIES 4IN1 cont'd


No	Part Description	Qty	Size
A	TAP	1	
B	O-ring	1	
C	Rubber Washer	1	47*32.5*3
D	Metal Washer	1	
E	Mounting nut	1	32*1.5
1	Cold flexible hose	1	M8*1-3/8"thread
2	Hot flexible hose	1	M8*1-1/2"thread
3	Hose from T adaptor to tap	1	M8*1-Ø1/4" quick fit
4	Hose from Chiller outlet to tap	1	M8*1-Ø1/4" quick fit
5	Hose from tap to boiler inlet	1	M8*1-3/8"thread
6	Hose from boiler outlet to tap	1	M8*1-3/8"thread
7	Hose from cold water supply to filter protective valve	1	3/8"thread-Ø1/4" quick fit
8	PE hose from filter protective valve to filter inlet	1	Ø1/4"
9	PE hose from filter outlet to T adaptor	1	Ø1/4"
10	PE hose from T adaptor to Leak Detector IN	1	Ø1/4"
11	PE hose from Leak Detector OUT to Chiller inlet Port	1	Ø1/4"
12	PE hose from chiller wastewater out to waste pipe	1	Ø1/4"
13	Brass three way connector	1	1/2"female*3/8"male*3/8"male
14	1/4" quick fit T-adaptor	1	Ø1/4" quick fit
15	Pressure Limiting Filter Protection Valve	1	Ø1/4" quick fit
16	Neoperl flow limiter	2	
17	Saddle drain	1	Ø1/4" quick fit
18	Leak Detector	1	Ø1/4" quick fit

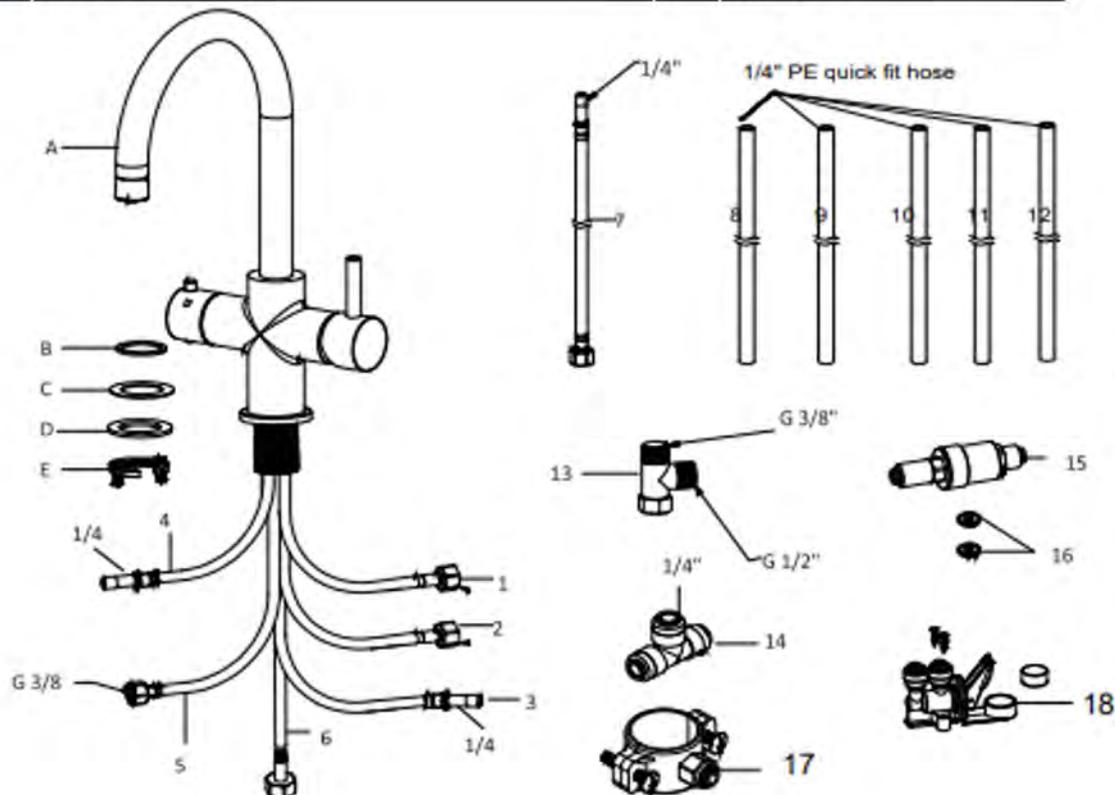

PEPPY TAPS

FLAGSHIP SERIES 4IN1 cont'd

Boiling Ambient

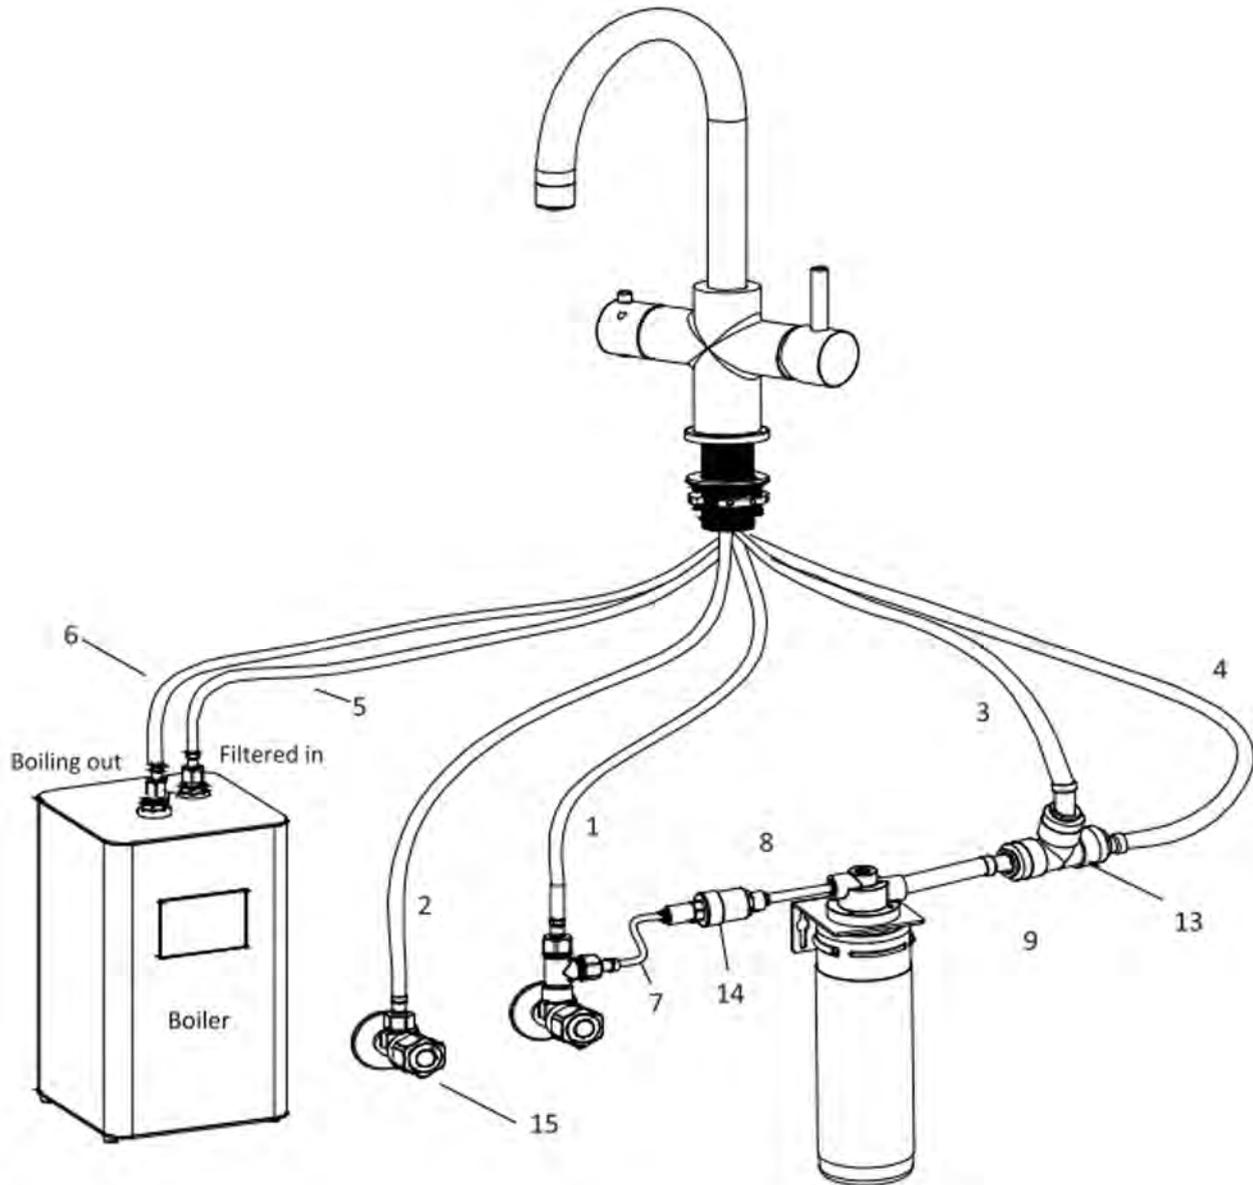


PEPPY TAPS

FLAGSHIP SERIES 4IN1 cont'd

BOILING CHILLED

February 2026

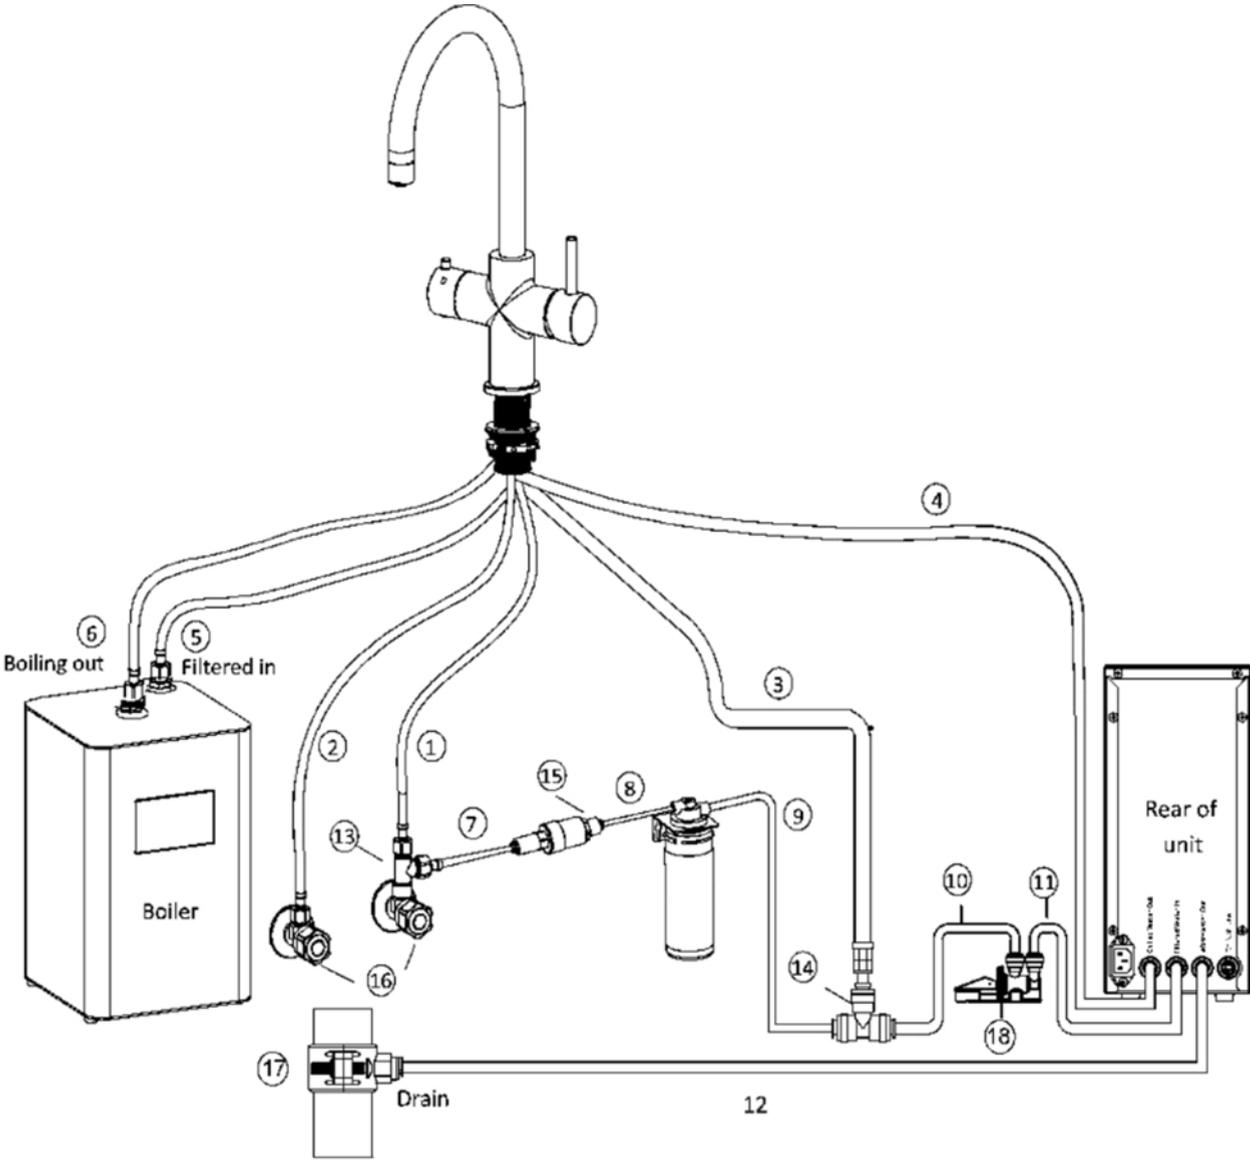

PEPPY TAPS


FLAGSHIP SERIES 4IN1 PULLOUT

FILTERED BOILING, FILTERED AMBIENT, HOT & COLD MAINS

ORDER CODES


CHROME	4IN1POBACH
MATTE BLACK	4IN1POBAMB
BRUSHED NICKEL	4IN1POBABN
GUN METAL GREY	4IN1POBAGMG
BRUSHED BRASS GOLD	4IN1POBABBG

PEPPY TAPS

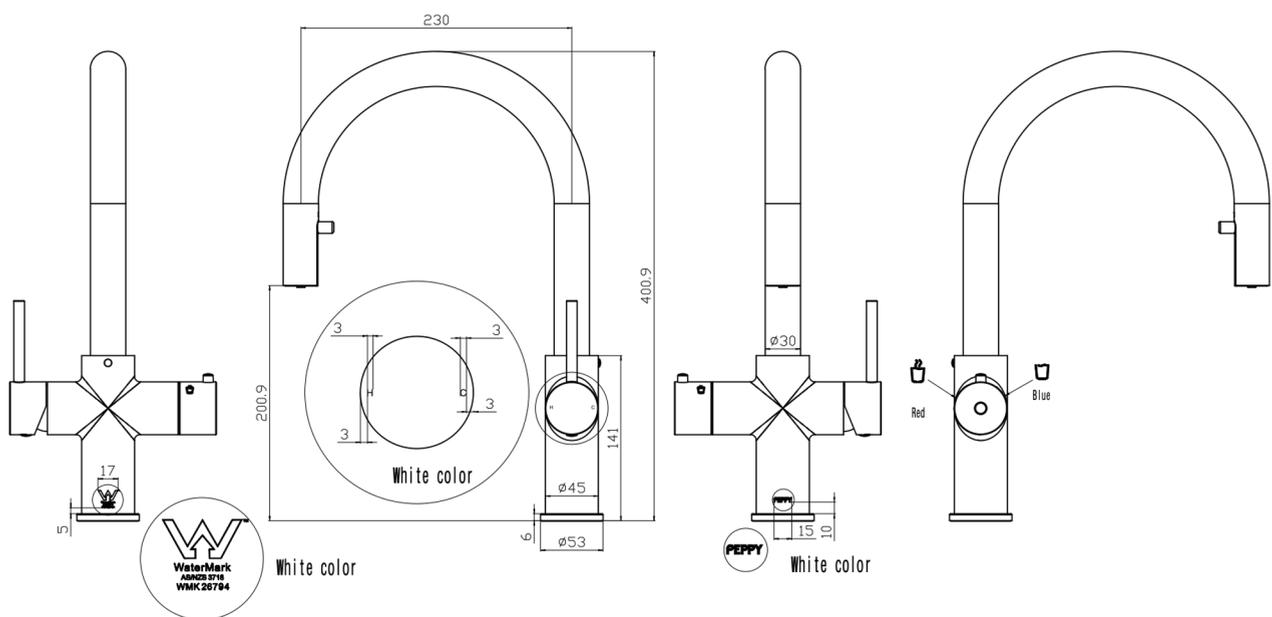

PEPPY TAPS


FLAGSHIP SERIES 4IN1 PULLOUT cont'd

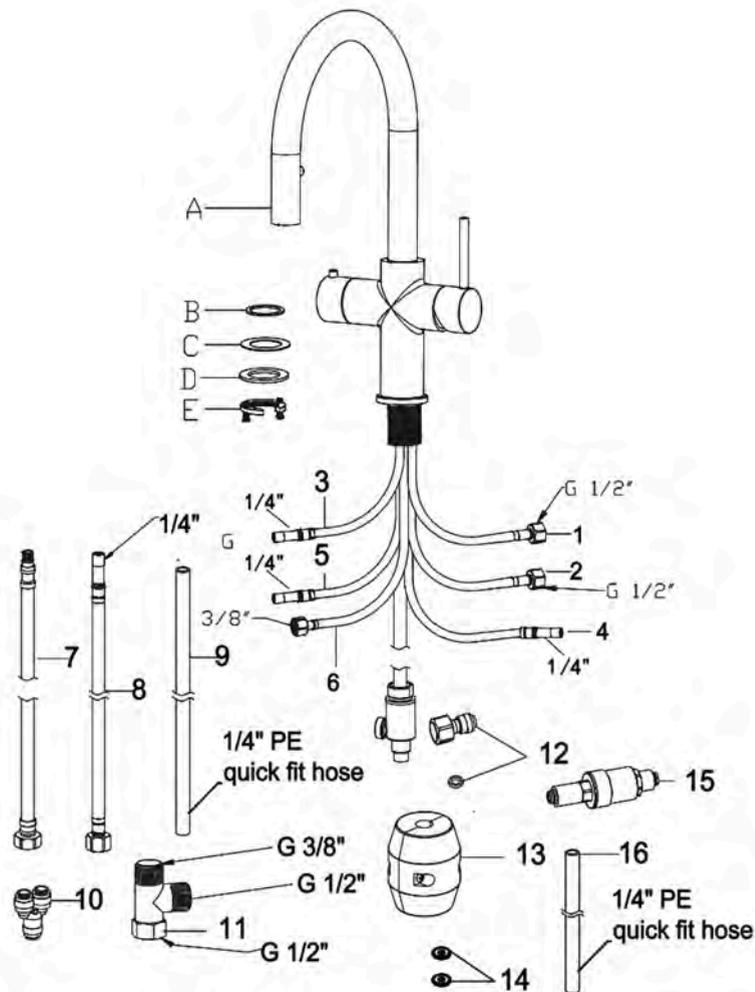

No	Part Description	Qty	Size
A	TAP	1	
B	O-ring	1	Ø50
C	Rubber Washer	1	47*34.5*3
D	Metal Washer	1	Ø32
E	Mounting nut	1	34*1.5
1	Cold flexible hose	1	M8*1-1/2"thread
2	Hot flexible hose	1	M8*1-1/2"thread
3	Hose from filter outlet to tap	1	M8*1-Ø1/4" quick fit
4	Hose from tap to mixed water Y adaptor	1	M8*1-Ø1/4" quick fit
5	Hose from tap to filter outlet to Y adaptor	1	M8*1-Ø1/4" quick fit
6	Hose from tap to boiler inlet	1	M8*1-3/8"thread
7	Hose from boiler outlet to tap	1	M8*1-3/8"thread
8	Hose from cold water supply to filter protective valve	1	3/8"thread-Ø1/4"quick fit
9	PE hose from Y adaptor to Three way connector	1	Ø1/4"
10	1/4" quick fit Y-adaptor	1	Ø1/4" quick fit
11	Three way connector	1	1/2"female*1/2"male*3/8"male
12	1/4" quick union	1	3/8"thread-Ø1/4" quick fit
13	clump weight	1	
14	Neoperl flow limiter	2	Ø1/4"
15	Pressure Limiting Filter Protection Valve	1	Ø1/4" quick fit
16	PE hose from filter protective valve to filter inlet	1	Ø1/4"

PEPPY TAPS

FLAGSHIP SERIES 4IN1 PULLOUT cont'd

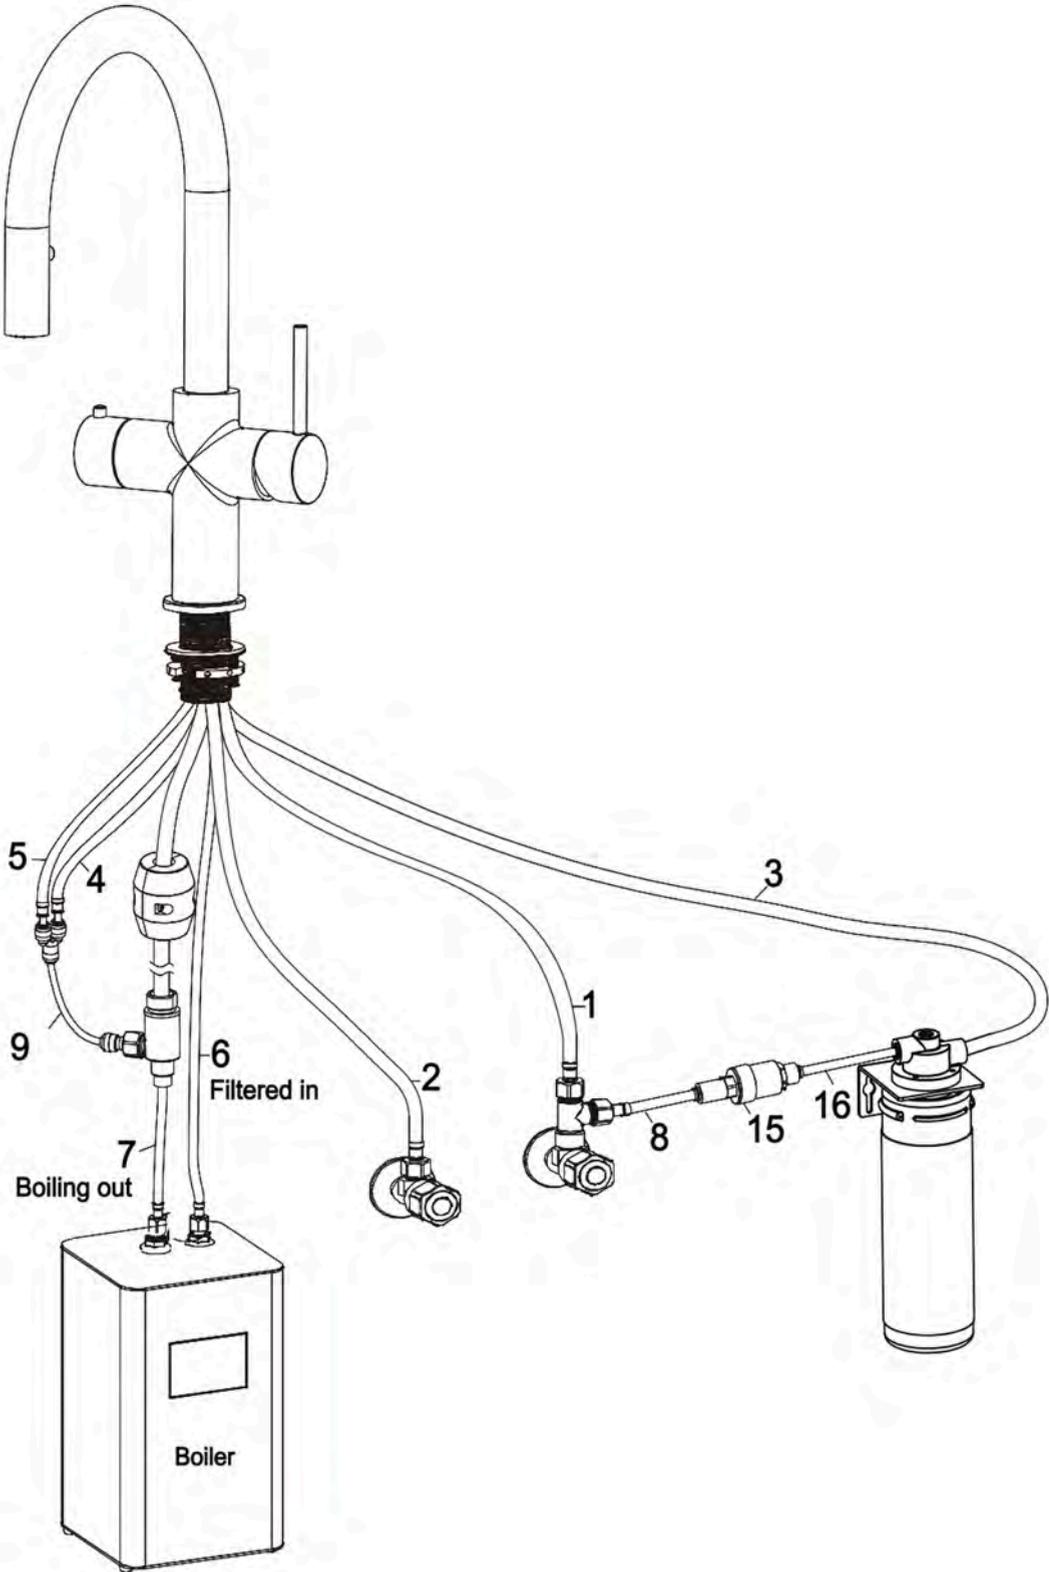

PEPPY TAPS


SIGNATURE SERIES 4IN1

FILTERED BOILING, FILTERED AMBIENT, HOT & COLD MAINS

FILTERED BOILING, FILTERED CHILLED, HOT & COLD MAINS

ORDER CODES


CHROME	4IN1BAELECCH	4IN1BCELECCH
MATTE BLACK	4IN1BAELECMB	4IN1BCELECMB
BRUSHED NICKEL	4IN1BAELECBN	4IN1BCELECBN
GUN METAL GREY	4IN1BAELECGMG	4IN1BCELECGMG
BRUSHED BRASS GOLD	4IN1BAELECBBG	4IN1BCELECBBG

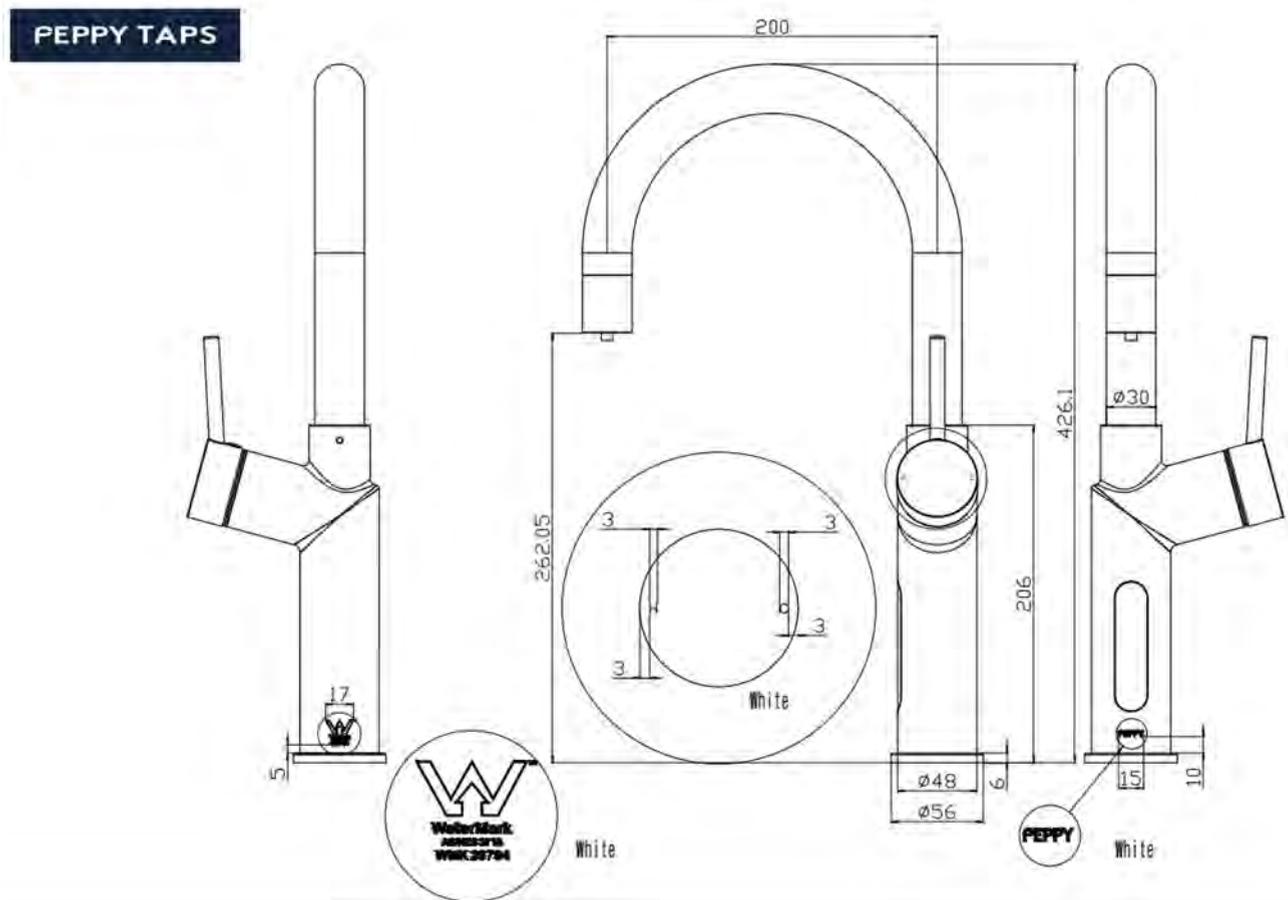

PEPPY TAPS

SIGNATURE SERIES 4IN1 cont'd


NO	Part Description	Qty	size
A	TAP	1	
B	O-ring	1	
C	Rubber Washer	1	47*32.5*3
D	Metal Washer	1	
E	Mounting nut	1	32*1.5
1	cold flexible hose	1	M8*1-1/2"thread
2	Hot flexible hose	1	M8*1-1/2"thread
3	Hose from Control box to chilled water inlet on tap	1	M8*1-Ø1/4" quick fit
4	Hose from boiler outlet to tap	1	M8*1-3/8"thread
5	Hose from cold water supply to pressure limiting valve	1	3/8"thread-Ø1/4" quick fit
6	PE hose from pressure limiting valve to filter inlet	1	Ø1/4"
7	PE hose from filter outlet to T adaptor	1	Ø1/4"
8	PE hose from T adaptor to chiller inlet	1	Ø1/4"
9	PE hose from chiller outlet to Control box chiller water inlet	1	Ø1/4"
10	PE hose from T adaptor to Control box boiling water inlet	1	Ø1/4"
11	PE hose from chiller Wastewater out to saddle drain	1	Ø1/4"
12	Three way connector	1	1/2"female*3/8"male*1/2"male
13	1/4" quick fit T-adaptor	1	Ø1/4" quick fit
14	Pressure Limiting valve	1	Ø1/4" quick fit
15	Neoperl flow limiter	2	1/2" insert
16	Saddle drain	1	Ø1/4" quick fit
17	1/4" quick union	1	3/8"thread-Ø1/4" quick fit
18	control box	1	
19	The power adapter	1	
20	PE hose from control box to boiler inlet	1	Ø1/4"
21	Leak detector	1	
22	PE hose	1	

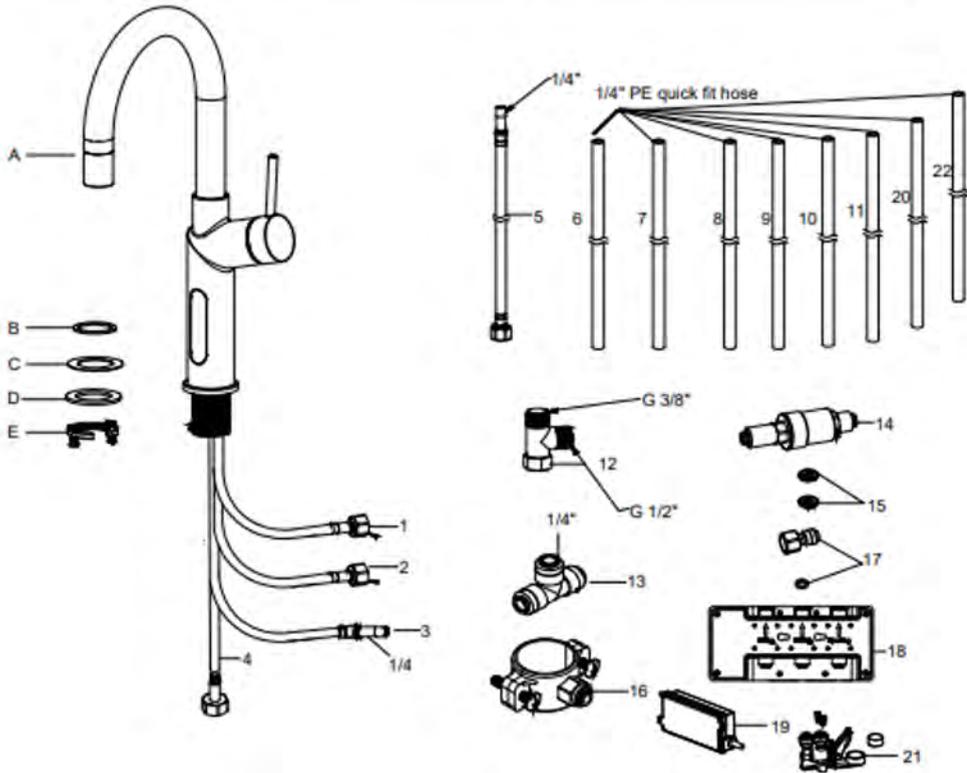

PEPPY TAPS

SIGNATURE SERIES 4IN1 cont'd


BOILING AMBIENT

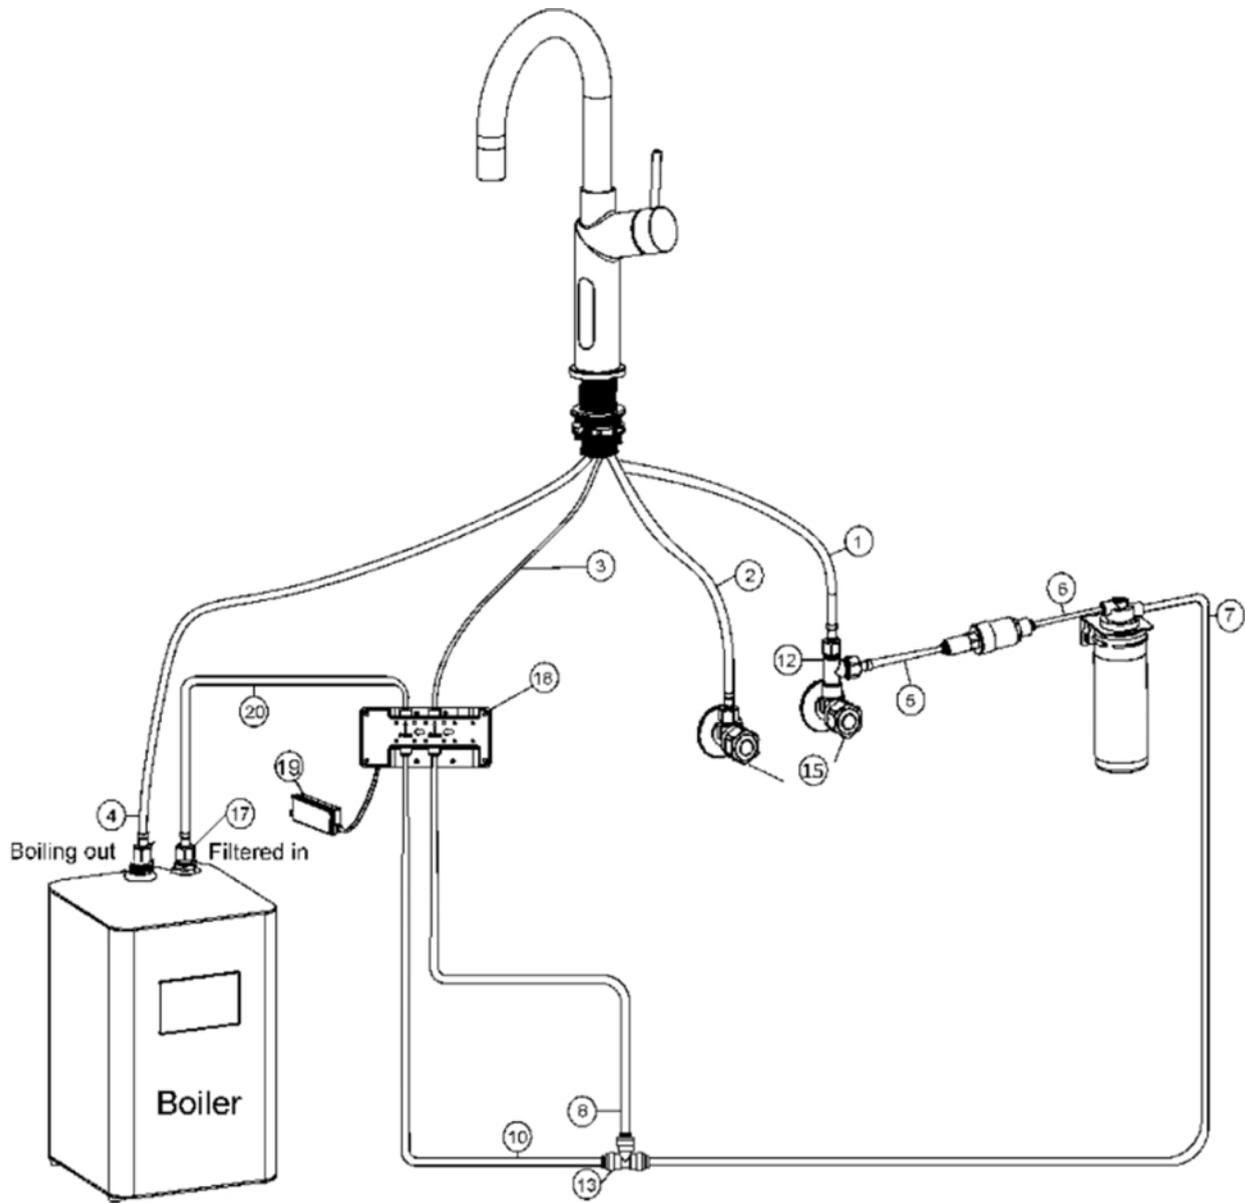

PEPPY TAPS


SIGNATURE SERIES 4IN1 cont'd

BOILING CHILLED

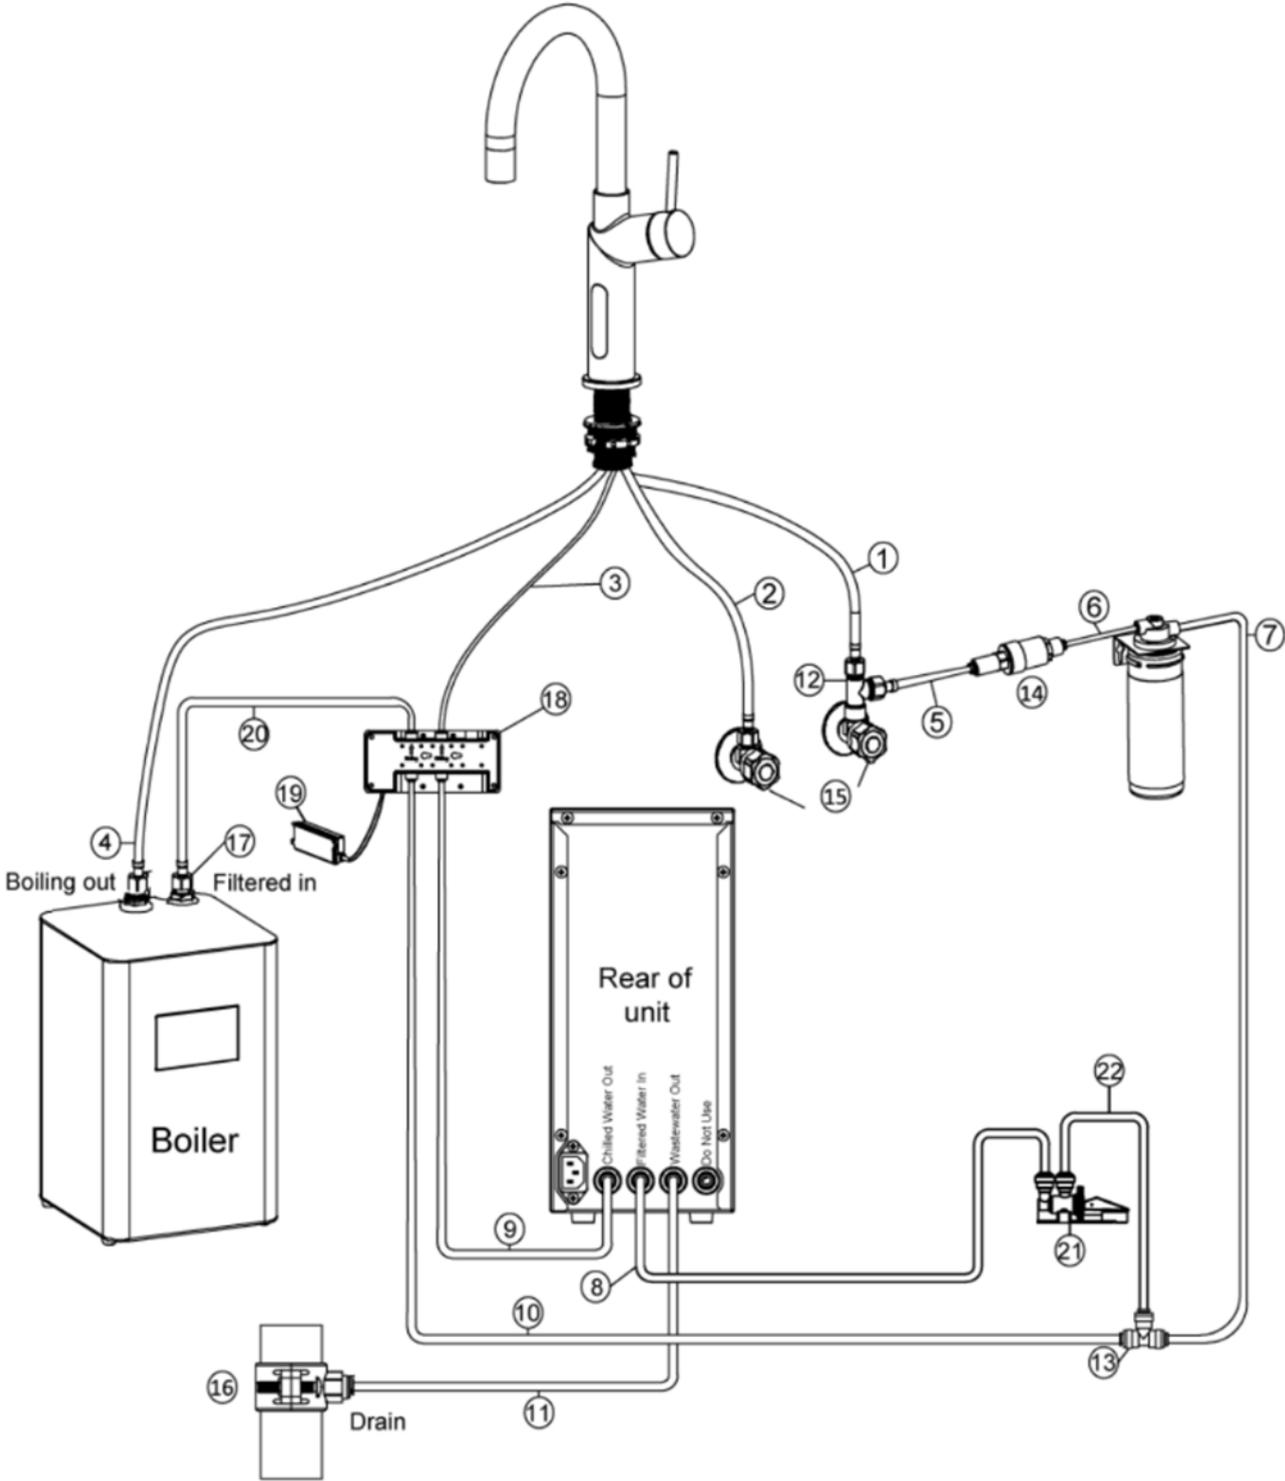

PEPPY TAPS


SIGNATURE SERIES 4IN1 PULLOUT cont'd

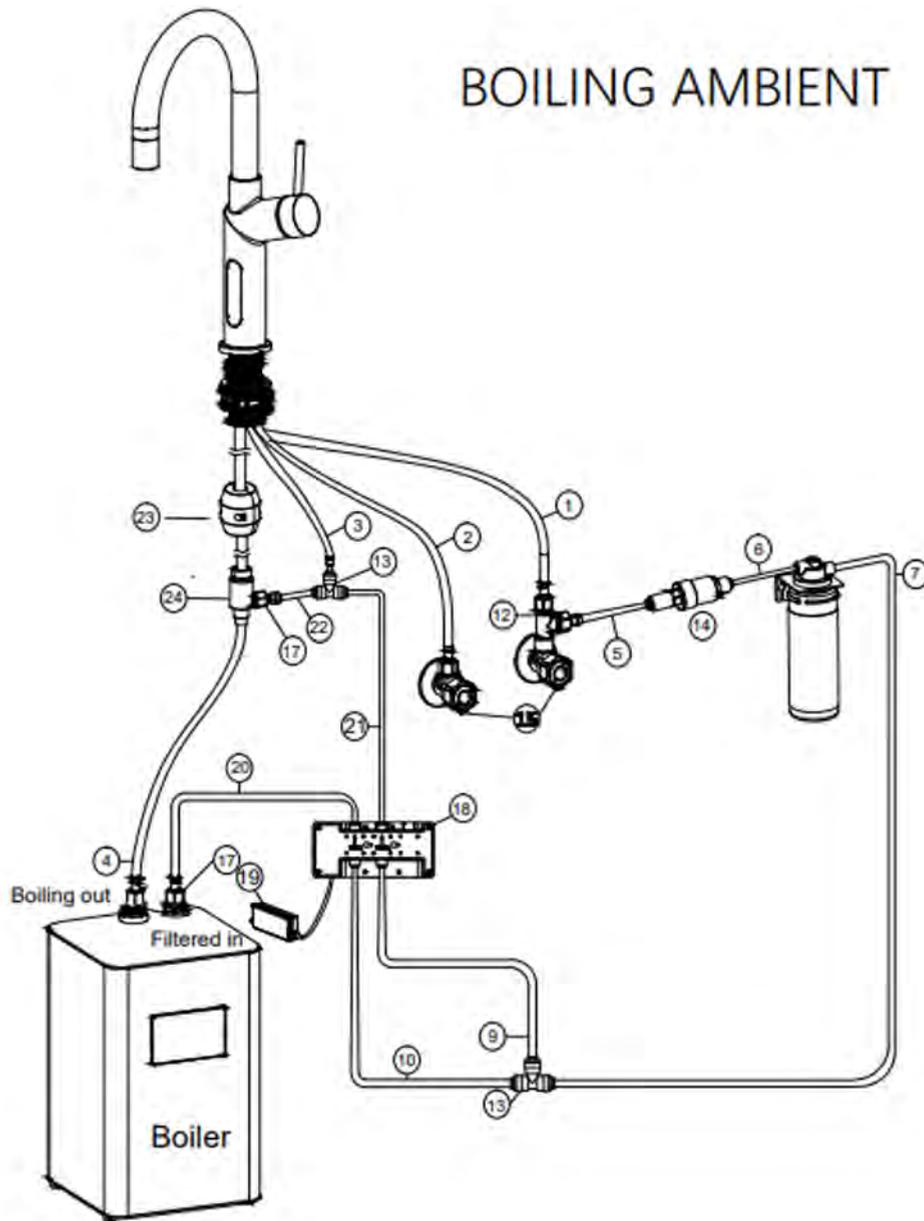

PEPPY TAPS

SIGNATURE SERIES 4IN1 PULLOUT cont'd

BOILING CHILLED

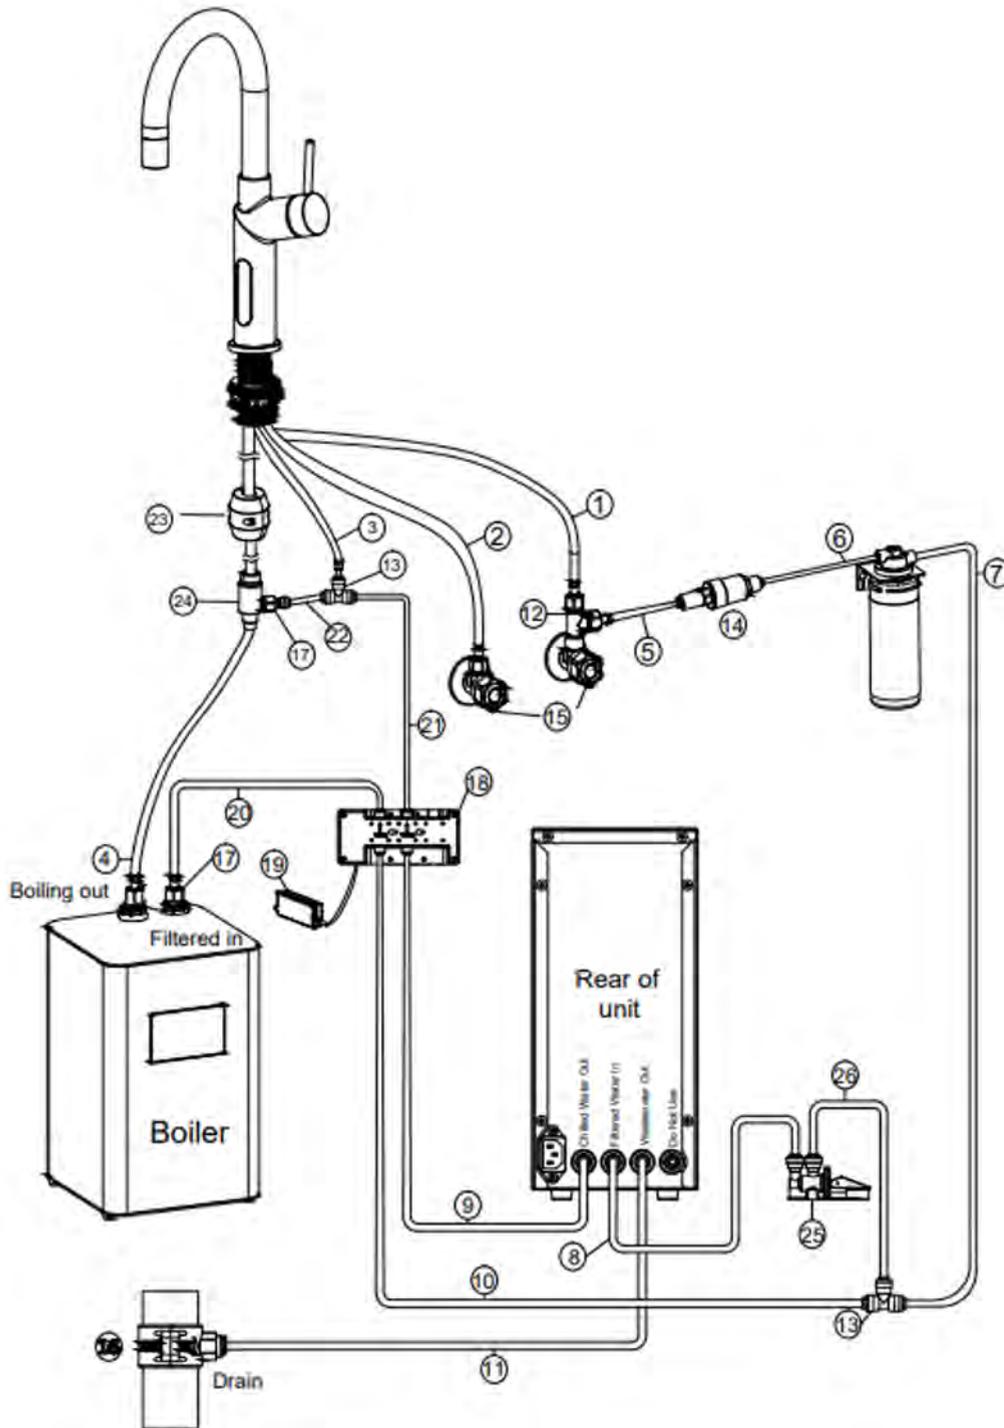


PEPPY TAPS

SIGNATURE SERIES 5IN1

**FILTERED BOILING, FILTERED CHILLED, FILTERED CHILLED SODA,
HOT & COLD MAINS**

ORDER CODES


CHROME	5IN1BCSELECCH
MATTE BLACK	5IN1BCSELECMB
BRUSHED NICKEL	5IN1BCSELECBN
GUN METAL GREY	5IN1BCSELECGMG
BRUSHED BRASS GOLD	5IN1BCSELECBBG

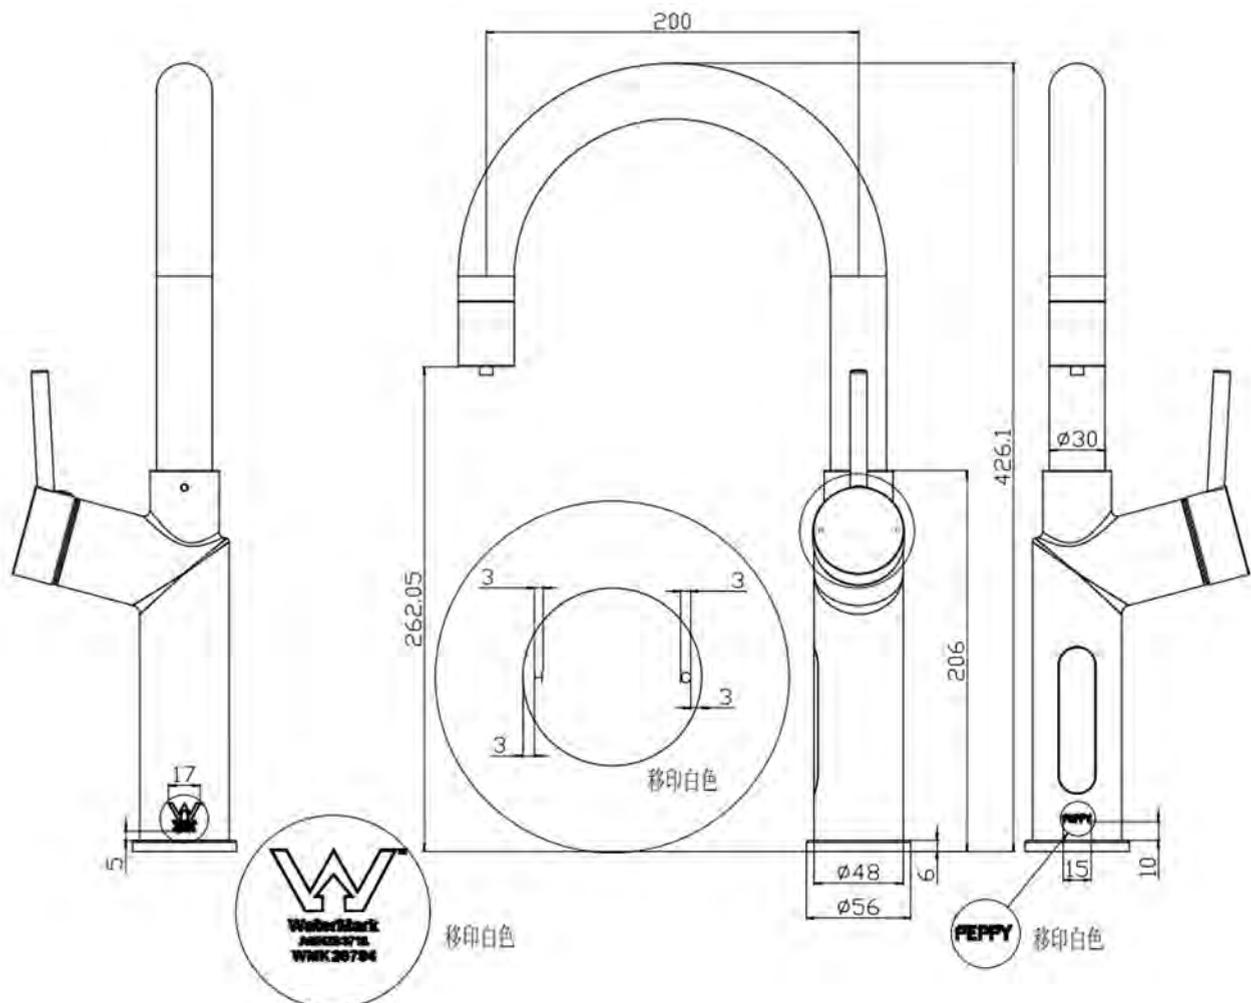

PEPPY TAPS

SIGNATURE SERIES 5IN1 cont'd


NO	Part Description	Qty	size
A	TAP	1	
B	O-ring	1	
C	Rubber Washer	1	47*32.5*3
D	Metal Washer	1	
E	Mounting nut	1	32*1.5
1	cold flexible hose	1	M8*1-1/2"thread
2	Hot flexible hose	1	M8*1-1/2"thread
3	Hose from Control box to chilled water inlet on tap	1	M8*1-Ø1/4" quick fit
4	Hose from boiler outlet to tap	1	M8*1-3/8"thread
5	Hose from cold water supply to pressure limiting valve	1	3/8"thread-Ø1/4" quick fit
6	PE hose from pressure limiting valve to filter inlet	1	Ø1/4"
7	PE hose from filter outlet to T adaptor	1	Ø1/4"
8	PE hose from T adaptor to chiller inlet	1	Ø1/4"
9	PE hose from chiller outlet to Control box chiller water inlet	1	Ø1/4"
10	PE hose from T adaptor to Control box boiling water inlet	1	Ø1/4"
11	PE hose from chiller Wastewater out to saddle drain	1	Ø1/4"
12	Three way connector	1	1/2"female*3/8"male*1/2"male
13	1/4" quick fit T-adaptor	1	Ø1/4" quick fit
14	Pressure Limiting valve	1	Ø1/4" quick fit
15	Neoperl flow limiter	2	1/2" insert
16	Saddle drain	1	Ø1/4" quick fit
17	1/4" quick union	1	3/8"thread-Ø1/4" quick fit
18	control box	1	
19	The power adapter	1	
20	PE hose from control box to boiler inlet	1	Ø1/4"
21	PE hose from CO ₂ canister inot chiller	1	Ø1/4"
22	PE hose from Sparking Water outlet to control box	1	Ø1/4"
23	Check valve three-way component	1	Ø1/4" quick fit-Ø1/4"
24	Pressure Rwgulator for CO ₂ canister	1	Ø1/4" quick fit
25	Leak detector	1	
26	PE hose	1	

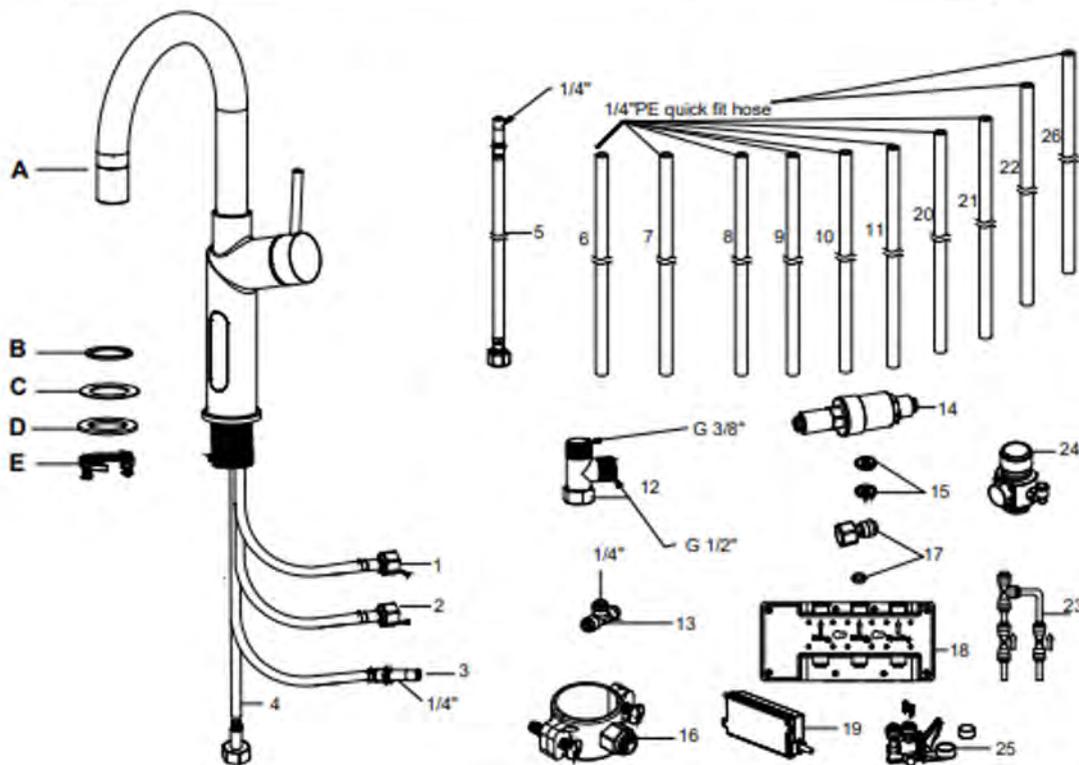

PEPPY TAPS

SIGNATURE SERIES 5IN1 cont'd

BOILING, CHILLED, CHILLED SODA

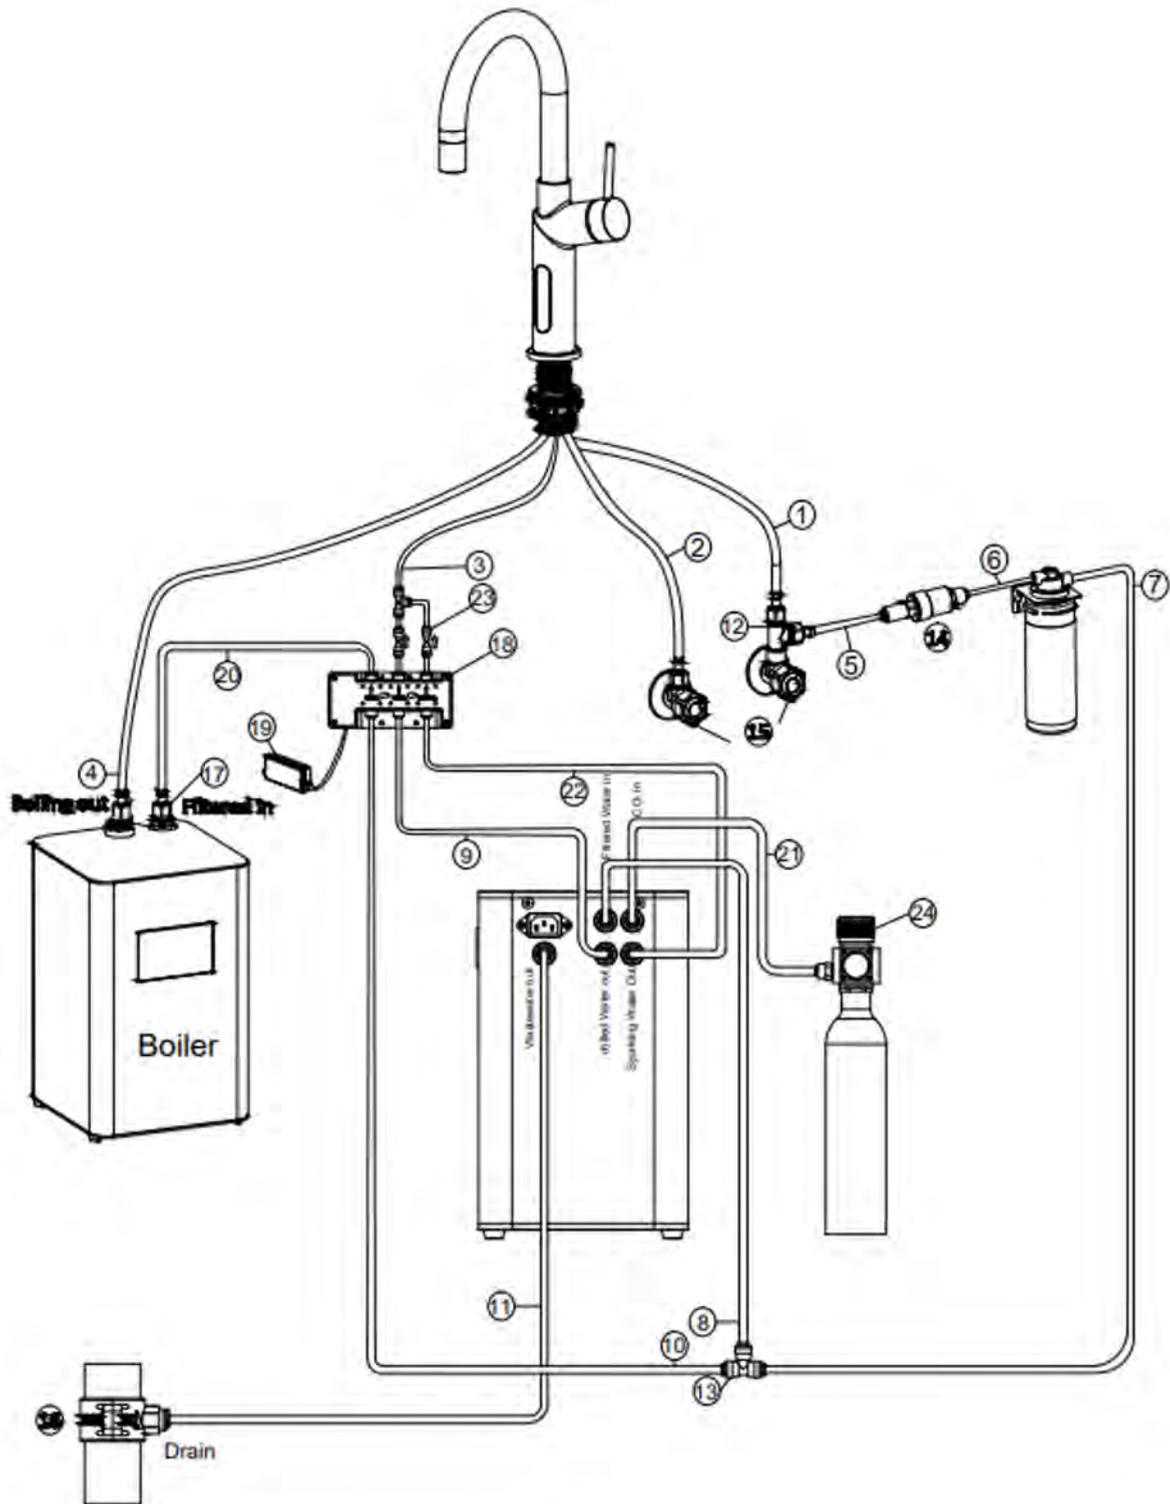

PEPPY TAPS

February 2026